Bathroom

Saffix

Revolutionary fixing system for installing towel rails in asbestos environments

PATENTED INNOVATION
PATENT
EUROPE & UK
PATENTED INNOVATION

Once installed

NEOMITIS offers the only patented fixing system on the market that is **100% SS4 compatible (Subsection 4),** allowing the replacement of a heating appliance in an asbestos environment without risk for the occupants.

DEVELOPED
DESIGNED AND
MANUFACTURED
FRANCE

- Fully secured system
- Economic
- Without reusing the existing fixing holes or drilling!
- Adaptable
- High performance
- Aesthetics

Benefits

+ Does not re-use the fixing holes of the existing unit.
+ Does not require drilling into the wall, the mounting brackets of the replacement unit are assembled on a wall plate.
+ Does not require any additional equipment to create a micro containment other than the ones required by the Public Health Code.
+ Complies with the requirements of the Public Health Code, the replacement can be carried out in an occupied environment.

Easy to install

1- Filling of existing existing drill holes

1st level of sealing against the emission of asbestos fibres.



2- Applying the adhesive & lay the base plate

2nd sealing level:
no dust circulation is possible between the wall and the mounting of the new device

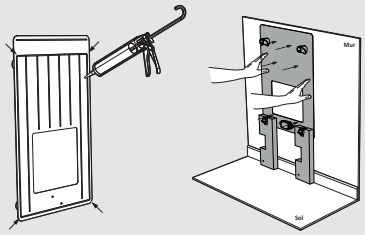

Drying time

After 15min: immediate adhesion
After 60min: tripled adhesion
After 24hrs: polymerisation, maximum adhesion

3- Connection

Integrated junction box, no need to remove the existing wall outlet.





4- Install and lock the towel rails



5- Finishing: removal of feet

Almost invisible wall plate once the new towel rails is installed.



Technical specifications

The patented kit includes:
- 1 steel support plate, perfect fit regardless of wall irregularities.
- 2 removable, 100% recyclable cardboard feet that ensure stability during the glue setting phase and improve resistance to shearing.
- 1 cartridge of adhesive (290ml) with very high adhesion: immediate adhesion of more than 47kg per m² and more than 141kg per m² after 1 hour.
- 4 washers + 4 nuts.
- 1 IP55 connection box mounted on the support.
- 3 wago 2-pole terminals.

Mechanical performance due to adhesive bonding and physical performance: high resistance to temperature, deformation and tearing.

References	Designation	Heights (mm)	Widths (mm)	Depths (mm)
BRDSE075KA	Fixing kit for 500W electric radiators in asbestos environments	450	750	12
ADHE-006-BOX*	Adhesive cartridge for SAFFIX fixing kit	–	–	–

**Please order the appropriate adhesive cartridge specific to the Saffix kit.*

NEOMITIS® LIMITED- 16 Great Queen Street, Covent Garden, London, WC2B 5AH UNITED KINGDOM- Registered in England and Wales No: 9543404
Tel: +44 (0) 2071 250 236- Fax: +44 (0) 2071 250 267- E-mail: contactuk@neomitis.com

Pictures and technical specifications are not contractual and given as an indication. Specifications may change depending on product development. Néomitis® keeps the right to change without notice.
All rights reserved - Photo credits: © Adobe Stock © Shutterstock